


Rotary Perforating Machine RPM 350

Efficient **rotary perforating machine RPM 350** with friction feeding, working width 350 mm and speed upto 8000 sheets/hour. Paper is perforated by opposite standing perforating wheels placed on two shafts. These tools (Note: as standard machine comes with 2 perforation sets) enable to create 1 to 5 parallel perforating lines. It is an ideal desk top machine for low to mid volume jobs for digital and offset printers. Machine comes with speed control and batch counter.

Product Features

- Reliable friction feeding.
- Speed regulation - 66-118 sheets/min.
- Exchangeable perforating wheels.
- Telescopic feeding and waste table.
- Possibility to adjust 1 – 5 perforating knives (Note: as standard machine comes with 2 perf sets)
- Creasing wheel in standard equipment.
- Exact paper adjusting directly towards perforating wheels.
- **Counter.**

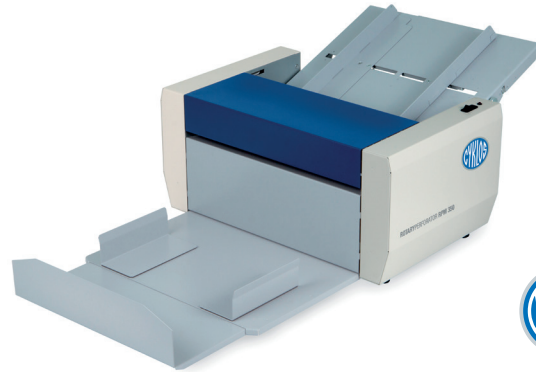

1 Spindle Electric Paper Drilling Machine



Product Features

- Punching capacity: FP-III 60 BS - 600 Sheets/sec (75gsm)
- Long lasting replaceable High-Tech hollow drill bits.
- Powerful & vibrationless drilling by special designed motor.
- Programmed bar installed for multi holes drilling setting.
- Continuous multi-hole drilling with universal stop gauge.
- Special designed sharpener attached for drill bits regrinding.
- Drill bits replacement easy to be done.

Hi-Tech Systems PFE P. Ltd.

243, A-2, Shah & Nahar Ind. Estate,
 Dhanraj Mill Compound,
 Lower Parel, Mumbai - 400 013 India
 T: +91 22 40049889 M: +91 9594 991234
 E: sales@hitechindia.net www.hitechindia.net

Product Specifications for RPM 350

Working Width	150 - 350 mm
Grammage	55 - 200 g/m ²
No. of Perforating Knives	2 (maximum 5)
Max. Input Capacity	30 mm
Speed	66 - 118 A4 sheets/min.
Dimensions(L x W x H mm)	1075 x 490 x 380 mm
Packing Size	550 x 400 x 405 mm
Weight	Nett 18,5 kg, gross 21,0 kg
Voltage/Frequency	220V / 50Hz

Product Specifications for Paper Drilling

Standard drill bits	FP-III 60 BS-6.0 mm(0.236") x 60(L) mm
Optional drill bits	3.0 mm - 9.0 mm
Back margin	5 - 50 mm
Dimension	500 mm(W) x 500 mm(D) x 555 mm(H)
Weight	32 kgs